**AIR MAIL**

10031450 000602

JC03 Rec'd PCT/PTO

PCT
22 JAN 2002

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

110/01309

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (if known see 37 CFR 1.5)

10/031450INTERNATIONAL APPLICATION NO.
PCT/IL 00/00458INTERNATIONAL FILING DATE
08/01/2000PRIORITY DATE CLAIMED
08/01/1999

TITLE OF INVENTION

Method and Apparatus for Spinal Procedures

APPLICANT(S) FOR DO/EO/US

Dekel Shmuel

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31)
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau)
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto
 - b. ☒ has been previously submitted under 35 U.S.C. 154(d)(4)
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau)
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made, however, the time limit for making such amendments has NOT expired
 - d. ☐ have not been made and will not be made
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5))

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included
13. ☐ A **FIRST** preliminary amendment
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment
15. ☐ A substitute specification
16. ☐ A change of power of attorney and/or address letter
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4)
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4)
20. ☒ Other items or information

**International Preliminary Examination Report
(Report and Annexes were sent by International Bureau)**


ATTORNEY'S BOOK NO. 11210

REGISTRATION NUMBER

Disc O Tech

Medical Technologies Ltd.

As an officer of applicant in patent application, which title is "Method and Apparatus for spinal procedures" I hereby declare that a small entity status is entitled to be asserted for this application


Tamir Kazaz, CPA

Disc -o- tech medical technologies Ltd

Jan 10, 2007
Date

10031450
Rec'd PCT/PTO 06 AUG 2002
10/031450

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Assaf DEKEL
Serial Number: 10/031,450
I.A. Filing Date: August 1, 2000
Title: Method and Apparatus for Spinal Procedures
Art Unit: Not Yet Assigned
Examiner: Not Yet Assigned

Honorable Commissioner of Patents and Trademarks
Washington DC 20231

PRELIMINARY AMENDMENT

Sir:

Further to a response to Notification of Missing Requirements dated April 1, 2002, kindly amend the application as follows prior to examination:

IN THE SPECIFICATION

Kindly add the following, on page 1, immediately after the title:

—RELATED APPLICATIONS

The present application is a U.S. national application of PCT/IL00/00458, filed August 1, 2000.—

IN THE CLAIMS

Kindly replace the present claims 4, 6-10, 14-29, 32-42, 44-55 with the following claims in clean form:

4. (Amended) Apparatus according to claim 1, comprising a shield adjacent said rasp, to prevent contact of said rasp with tissue at at least some locations along said rasp.
6. (Amended) Apparatus according to claim 4, wherein said rasp is positioned between said shield and said handle, such that said rasp has an at least partially unshielded active face towards said handle.

7. (Amended) Apparatus according to claim 4, wherein the relative positions of the rasp and shield with respect to said handle are changeable by rotation of at least one of the rasp and the shield around an axis connecting said tips.
8. (Amended) Apparatus according to claim 4, wherein said rasp has two narrow sides and wherein said shield protects tissue from the sides of said rasp.
9. (Amended) Apparatus according to claim 4, wherein said shield is fixed relative to said tips.
10. (Amended) Apparatus according to claim 4, wherein said shield is adapted to move axially with said rasp.
14. (Amended) Apparatus according to claim 1, comprising at least one resting point at at least one of said extensions, which resting point is adapted to engage a vertebra.
15. (Amended) Apparatus according to claim 1, wherein said rasp has a transaxial width narrow enough to fit inside a vertebral channel of a adult human.
16. (Amended) Apparatus according to claim 1, wherein said rasp is less than 7 mm wide in a transaxial direction.
17. (Amended) Apparatus according to claim 1, wherein said rasp is less than 5 mm wide.
18. (Amended) Apparatus according to claim 1, wherein said rasp is less than 3 mm wide.
19. (Amended) Apparatus according to claim 1, wherein said rasp is less than 2 mm wide.
20. (Amended) Apparatus according to claim 1, wherein said rasp is thinner than 1mm.
21. (Amended) Apparatus according to claim 1, wherein said rasp is thinner than 0.5 mm.
22. (Amended) Apparatus according to claim 1, wherein said rasp is thinner than 0.3 mm.

23. (Amended) Apparatus according to claim 1, wherein said rasp is thinner than 0.1 mm.
24. (Amended) Apparatus according to claim 1, wherein said rasp is adapted to remove vertebral bone.
25. (Amended) Apparatus according to claim 1, wherein said rasp is adapted to remove calcifications.
26. (Amended) Apparatus according to claim 1, wherein said rasp is adapted to remove ligament tissue.
27. (Amended) Apparatus according to claim 1, wherein said rasp is formed of metal.
28. (Amended) Apparatus according to claim 1, wherein said rasp is formed of a bioabsorbable material.
29. (Amended) Apparatus according to claim 1, wherein a plurality of rasp elements are defined on said rasp.
32. (Amended) Apparatus according to claim 1, wherein a plurality of rasp elements are attached to said rasp.
33. (Amended) Apparatus according to claim 1, wherein said rasp comprises a cable.
34. (Amended) Apparatus according to claim 1, wherein said rasp comprises a chain.
35. (Amended) Apparatus according to claim 29, wherein said rasp elements are adapted to guide removed tissue away from the tissue on which the rasp is working.
36. (Amended) Apparatus according to claim 29, wherein said rasp elements are adapted to retain removed tissue.

37. (Amended) Apparatus according to claim 1, comprising a source of cleaning fluid, adjacent said rasp.

38. (Amended) Apparatus according to claim 1, comprising a source of vacuum, adjacent said rasp.

39. (Amended) Apparatus according to claim 1, wherein said rasp has a total length selected to be substantially sufficient for a spinal stenosis removal procedure.

40. (Amended) Apparatus according to claim 1, wherein said rasp has a total length of between 0.5 and 4 meters.

41. (Amended) Apparatus according to claim 1, wherein said rasp has a total length of between 1 and 3 meters.

42. (Amended) Apparatus according to claim 1, wherein said rasp has an active length defined by a distance between said tips.

44. (Amended) Apparatus according to claim 42, wherein said active length is sufficient to span between one and ten vertebra of a adult human.

45. (Amended) Apparatus according to claim 42, wherein said active length is sufficient to span between two and eight vertebra of a adult human.

46. (Amended) Apparatus according to claim 42, wherein said active length is sufficient to span between three and four vertebra of a adult human.

47. (Amended) Apparatus according to claim 1, wherein said extensions are sufficiently long to extend from a body surface to a spinal channel of a adult human.

48. (Amended) Apparatus according to claim 1, comprising a rasp advancer for advancing said rasp in a single direction.

49. (Amended) Apparatus according to claim 1, comprising a rasp advancer for reciprocating said rasp.

REMARKS


The present application is a national phase of PCT Application No. PCT/IL00/00458, filed August 1, 2000. The application is based on the claims as originally filed in the PCT. The present amendment is made to remove multiple dependencies to reduce costs and put the application in better form for examination in the US.

Since the international application is not considered to be an earlier application, MPEP §1893.03 provides that it is not necessary to refer to the international application in an amendment to the first sentence of the specification. Nevertheless, applicant hereby amends the specification to include such a reference.

A marked-up version of the amendments is attached hereto.

An examination on the merits is respectfully requested.

Respectfully submitted,
Assaf DEKEL


Paul Fenster
Reg. No. 33,877

July 31, 2002
William H. Dippert, Esq.
Reed Smith LLP
599 Lexington Avenue, 29th Floor
New York, NY 10022-7650

Tel: (212) 521-5400

Version with Markings to Show Changes Made

4. (Amended) Apparatus according to claim 1~~any of claims 1-3~~, comprising a shield adjacent said rasp, to prevent contact of said rasp with tissue at at least some locations along said rasp.
6. (Amended) Apparatus according to claim 4~~or claim 5~~, wherein said rasp is positioned between said shield and said handle, such that said rasp has an at least partially unshielded active face towards said handle.
7. (Amended) Apparatus according to claim 4~~or claim 5~~, wherein the relative positions of the rasp and shield with respect to said handle are changeable by rotation of at least one of the rasp and the shield around an axis connecting said tips.
8. (Amended) Apparatus according to claim 4~~any of claims 4-7~~, wherein said rasp has two narrow sides and wherein said shield protects tissue from the sides of said rasp.
9. (Amended) Apparatus according to claim 4~~any of claims 4-8~~, wherein said shield is fixed relative to said tips.
10. (Amended) Apparatus according to claim 4~~any of claims 4-8~~, wherein said shield is adapted to move axially with said rasp.
14. (Amended) Apparatus according to claim 1~~any of claims 1-13~~, comprising at least one resting point at at least one of said extensions, which resting point is adapted to engage a vertebra.
15. (Amended) Apparatus according to claim 1~~any of claims 1-14~~, wherein said rasp has a transaxial width narrow enough to fit inside a vertebral channel of a adult human.
16. (Amended) Apparatus according to claim 1~~any of claims 1-14~~, wherein said rasp is less than 7 mm wide in a transaxial direction.

17. (Amended) Apparatus according to claim 1 ~~any of claims 1-14~~, wherein said rasp is less than 5 mm wide.
18. (Amended) Apparatus according to claim 1 ~~any of claims 1-14~~, wherein said rasp is less than 3 mm wide.
19. (Amended) Apparatus according to claim 1 ~~any of claims 1-14~~, wherein said rasp is less than 2 mm wide.
20. (Amended) Apparatus according to claim 1 ~~any of claims 1-14~~, wherein said rasp is thinner than 1mm.
21. (Amended) Apparatus according to claim 1 ~~any of claims 1-20~~, wherein said rasp is thinner than 0.5 mm.
22. (Amended) Apparatus according to claim 1 ~~any of claims 1-20~~, wherein said rasp is thinner than 0.3 mm.
23. (Amended) Apparatus according to claim 1 ~~any of claims 1-20~~, wherein said rasp is thinner than 0.1 mm.
24. (Amended) Apparatus according to claim 1 ~~any of claims 1-23~~, wherein said rasp is adapted to remove vertebral bone.
25. (Amended) Apparatus according to claim 1 ~~any of claims 1-23~~, wherein said rasp is adapted to remove calcifications.
26. (Amended) Apparatus according to claim 1 ~~any of claims 1-25~~, wherein said rasp is adapted to remove ligament tissue.
27. (Amended) Apparatus according to claim 1 ~~any of claims 1-26~~, wherein said rasp is formed of metal.

28. (Amended) Apparatus according to claim 1~~any of claims 1-26~~, wherein said rasp is formed of a bioabsorbable material.

29. (Amended) Apparatus according to claim 1~~any of claims 1-28~~, wherein a plurality of rasp elements are defined on said rasp.

32. (Amended) Apparatus according to claim 1~~any of claims 1-28~~, wherein a plurality of rasp elements are attached to said rasp.

33. (Amended) Apparatus according to claim 1~~any of claims 1-28~~, wherein said rasp comprises a cable.

34. (Amended) Apparatus according to claim 1~~any of claims 1-28~~, wherein said rasp comprises a chain.

35. (Amended) Apparatus according to claim 29~~any of claims 29-32~~, wherein said rasp elements are adapted to guide removed tissue away from the tissue on which the rasp is working.

36. (Amended) Apparatus according to claim 29~~any of claims 29-32~~, wherein said rasp elements are adapted to retain removed tissue.

37. (Amended) Apparatus according to claim 1~~any of claims 1-36~~, comprising a source of cleaning fluid, adjacent said rasp.

38. (Amended) Apparatus according to claim 1~~any of claims 1-37~~, comprising a source of vacuum, adjacent said rasp.

39. (Amended) Apparatus according to claim 1~~any of claims 1-38~~, wherein said rasp has a total length selected to be substantially sufficient for a spinal stenosis removal procedure.

40. (Amended) Apparatus according to claim 1~~any of claims 1-38~~, wherein said rasp has a total length of between 0.5 and 4 meters.

41. (Amended) Apparatus according to claim 1 ~~any of claims 1-38~~, wherein said rasp has a total length of between 1 and 3 meters.

42. (Amended) Apparatus according to claim 1 ~~any of claims 1-41~~, wherein said rasp has an active length defined by a distance between said tips.

44. (Amended) Apparatus according to claim 42 ~~or claim 43~~, wherein said active length is sufficient to span between one and ten vertebra of a adult human.

45. (Amended) Apparatus according to claim 42 ~~or claim 43~~, wherein said active length is sufficient to span between two and eight vertebra of a adult human.

46. (Amended) Apparatus according to claim 42 ~~or claim 43~~, wherein said active length is sufficient to span between three and four vertebra of a adult human.

47. (Amended) Apparatus according to claim 1 ~~any of claims 1-46~~, wherein said extensions are sufficiently long to extend from a body surface to a spinal channel of a adult human.

48. (Amended) Apparatus according to claim 1 ~~any of claims 1-47~~, comprising a rasp advancer for advancing said rasp in a single direction.

49. (Amended) Apparatus according to claim 1 ~~any of claims 1-47~~, comprising a rasp advancer for reciprocating said rasp.

50. (Amended) Apparatus according to claim 1 ~~any of claims 1-49~~, wherein said apparatus comprises at least two parts, separable such that said first and said second extensions are in separate parts during a normal use of said apparatus.

51. (Amended) Apparatus according to claim 1 ~~any of claims 1-50~~, comprising means for affixing said apparatus to a vertebra.

52. (Amended) Apparatus according to claim 1 ~~any of claims 1-51~~, comprising a spring for setting a tension in said rasp.

53. (Amended) Apparatus according to claim 1 ~~any of claims 1-52~~, comprising a spring for setting a surface pressure of said rasp against a working surface.

54. (Amended) Apparatus according to claim 1 ~~any of claims 1-53~~, comprising a gauge for measuring a tension in said rasp.

55. (Amended) Apparatus according to claim 1 ~~any of claims 1-54~~, comprising a leader attached to one end of said rasp, which leader is adapted for inserting through a spinal channel.

FIELD OF THE INVENTION

5 BACKGROUND OF THE INVENTION

10 Figs. 1A and 1B illustrate a vertebra 100 in top and side views respectively, illustrating common types of spinal stenosis. A vertebra 100 comprises a body 102 and processes 103, which surround laminae 108 and pedicles 111. The laminae and the pedicles define a spinal channel 106, in which a spinal cord 104 is disposed. A ligament (yellow ligament, ligamentum flavum) 110 separates spinal cord 104 from the lamina 108.

Typical causes of spinal stenosis include:

- (a) thickening and calcification of ligament 110;
- (b) thickening of lamina 108; and
- (c) hypertrophy of the joint between two vertebra and especially the inferior articular

Most often, spinal stenosis is caused by a combination of (a) and (c) above.

One known surgical procedure for treating spinal stenosis is lumbar laminectomy in which the bony outer layer of the spinal column is removed, to allow room for cord 104. In a variation of this procedure, windowed laminectomy, only plugs of the bone are removed, for example at articular processes 112, thereby reducing trauma to the spine and associated tissues.

One problem with the full laminectomy methods is that the spine loses stability so the spine usually needs to be fused. Another problem is that laminectomy is a major surgery, often not suitable for the elderly, who, as a group, are more likely to suffer from spinal stenosis than other age groups. In addition, laminectomy has an associated overall surgical mortality rate of about a 1%.

German patent publication DE 40 36 804 A1, the disclosure of which is incorporated herein by reference describes a device for removing portions of the spine, apparently for correcting spinal stenosis, for example stenosis caused by spondylolytic damage.

SUMMARY OF THE INVENTION

One object of some exemplary embodiments of the invention is to enlarge a spinal lumen using minimally invasive techniques, especially for treating spinal stenosis.

One aspect of some exemplary embodiments of the invention relates to a method of removing axial extents of spinal bone, from inside the spinal channel, especially for relieving spinal stenosis. In an exemplary embodiment of the invention, a bone removing device is inserted into the channel, between a spinal cord and a protrusion and the device is activated to remove the protrusion.

An aspect of some exemplary embodiments of the invention relates to a method of spinal surgery in which portions of the spine, not adjacent to joints thereof are removed using minimally invasive techniques, such as using an endoscope, which techniques do not require a large incision in the back. Optionally, the bone is removed from inside the spinal channel. Alternatively, the bone is removed in plugs, from outside the channel.

An aspect of some exemplary embodiments of the invention relates to entering the spinal column at one point thereof, traveling along the spinal column and exiting at a second point along the spinal column. Optionally, a bone removing device is provided along this path to remove portions of bone and/or other tissues which cause stenosis of the spinal column. In some cases, the bone removing device is provided along a secondary path, such as the channel of a branching nerve, rather than the main channel of the spine. Thus, stenosis of a branching nerve may also be directly treated.

An aspect of some exemplary embodiments of the invention relates to such a path comprising more than one vertebrae, for example two, three, four, five, six, seven or even more. In an exemplary embodiment of the invention, stenosis along all the vertebrae are treated simultaneously. Alternatively, only fewer than all the vertebra, such as only one, are treated at a time.

An aspect of some exemplary embodiments of the invention relates to moving a device axially along the spinal column and inside the spinal column. Possibly, the device exits the spinal column and then the body, using only forward motion. In an exemplary embodiment of the invention, the device is a leader which pulls behind it a rasp. Alternatively or additionally, the device is a side or forward looking endoscope or ultrasonic imager, used to diagnose the condition of the spinal column and/or of the spinal nerve.

An aspect of some exemplary embodiments of the invention relates to removing bone tissue, especially in the spinal column, by axial rasping, in which an axially moving bone rasping device removes the bone. This removal is instead of or in addition to rotational rasping

by a rotating bone rasping device. Alternatively, only rotational rasping is provided, in which the axis of rotation is optionally aligned with the axis of the spine. In an exemplary embodiment of the invention, the rasping motion (rotational and/or axial) is unidirectional. Alternatively, the rasping motion is reciprocating.

5 A related aspect of some exemplary embodiments of the invention is an axially elongated rasp, which may be flexible, for removing bone and/or other tissue from within a spinal column.

10 An aspect of some exemplary embodiments of the invention relates to a device for inserting a rasp along a spinal column. In an exemplary embodiment of the invention, the device includes a feeder for feeding a rasp into an entry hole and through the spinal column and a take-up for taking up the rasp from the spinal column, at an exit hole. Possibly, the rasp rotates. Possibly, the rasp exhibits spiral motion along its length, possibly assisting in removing debris from the spinal column.

15 An aspect of some exemplary embodiments of the invention relates to protective mechanisms for protecting portions of the spine from undesired action of the rasp. In an exemplary embodiment of the invention, a protective layer or device is provided between the rasp and the spinal cord (or its dura), so that the rasp does not come in contact with the spinal cord or even the dura. This layer optionally does not move with the rasp. Such a layer may also be used for a rotating rasp. Alternatively to the layer not moving, it may move with the rasp or even be integral with it. For example, the back of the rasp is made smooth so that any contact between it and the dura does not stress or otherwise damage the dura or the underlying spinal cord. Alternatively or additionally, a shield is provided between the rasp and the spinal column at points where limited or no rasping action is desired. An example of such a location is surrounding the entry point and/or exit point of the rasp-path in the spinal column. Another example of locating a shield in accordance with an exemplary embodiment of the invention is to provide a shield only at certain axial and/or trans-axial locations along the path in the spinal column, to support spatially selective removal of bone and/or ligaments.

25 An aspect of some exemplary embodiments of the invention relates to a method of treating the spine in which a device for treating the spine is temporarily connected to two non-adjacent vertebrae. In an exemplary embodiment of the invention, attachment of the device to the vertebra is utilized to guide the motion of a section of the device through the spinal channel.

30 An aspect of some exemplary embodiments of the invention relates to removing portions of the spine which are located along the spinal channel and near a center of a vertebra,

without damaging the vertebra outside the spinal channel. In an exemplary embodiment of the invention, a rasp is provided inside the spinal channel, from the spaces between the vertebra and this rasp removes portions of the vertebra, only on the inside of the channel.

There is thus provided in accordance with an exemplary embodiment of the invention,
5 a method of modifying a spine, comprising:

guiding a bone removal device to the spine; and
removing axial extents of said spine using said device. Optionally, said device comprises an axially moving rasp.

There is also provided in accordance with an exemplary embodiment of the invention,
10 a method of modifying a spine, comprising:

guiding a bone removal device to the spine, through a tube lumen; and
removing portions of said spine using said device.

There is also provided in accordance with an exemplary embodiment of the invention,
a method of operating on a spine, comprising:

15 inserting a device into a spinal channel of said spine; and
advancing said device along said channel, for the length of at least two vertebra.

There is also provided in accordance with an exemplary embodiment of the invention,
a method of inserting an elongate, flexible device into a spine, comprising:

20 guiding a tip of the device between two vertebra into a spinal channel of said spine;
guiding said tip along said spine; and
existing said tip from said spine and from said body.

There is also provided in accordance with an exemplary embodiment of the invention,
apparatus for removing bone, comprising:

a handle;
25 a first extension attached to said handle;
a second extension attached to said handle; and
a flexible rasp extending between a tip of said first extension and a tip of said second extension. Optionally, said rasp moves axially between said tips. Optionally, the apparatus comprises a pick-up reel for advancing said rasp between said tips.

30 In an exemplary embodiment of the invention, the apparatus comprises a shield adjacent said rasp, to prevent contact of said rasp with tissue at at least some locations along said rasp. Optionally, said rasp has two faces, and wherein said shield protects tissue from one face of said rasp. Alternatively or additionally, said rasp is positioned between said shield and said handle, such that said rasp has an at least partially unshielded active face towards said

handle. Alternatively or additionally, the relative positions of the rasp and shield with respect to said handle are changeable by rotation of at least one of the rasp and the shield around an axis connecting said tips.

5 In an exemplary embodiment of the invention, said rasp has two narrow sides and wherein said shield protects tissue from the sides of said rasp. Alternatively or additionally, said shield is fixed relative to said tips. Alternatively or additionally, said shield is adapted to move axially with said rasp. Optionally, said shield comprises a smooth backing on said rasp.

10 In an exemplary embodiment of the invention, said shield comprises a channel within which said rasp is positioned. Optionally, said shield cooperates with said rasp to accumulate tissue removed by said rasp between said rasp and said shield.

15 In an exemplary embodiment of the invention, the apparatus comprises at least one resting point at at least one of said extensions, which resting point is adapted to engage a vertebra. Alternatively or additionally, said rasp has a transaxial width narrow enough to fit inside a vertebral channel of a adult human. Alternatively or additionally, said rasp is less than 7 mm wide in a transaxial direction. Alternatively or additionally, said rasp is less than 5 mm wide. Alternatively or additionally, said rasp is less than 3 mm wide. Alternatively or additionally, said rasp is less than 2 mm wide. Alternatively or additionally, said rasp is thinner than 1mm. Alternatively or additionally, said rasp is thinner than 0.5 mm. Alternatively or additionally, said rasp is thinner than 0.3 mm. Alternatively or additionally, said rasp is thinner than 0.1 mm.

20 In an exemplary embodiment of the invention, said rasp is adapted to remove vertebral bone. Alternatively or additionally, said rasp is adapted to remove calcifications. Alternatively or additionally, said rasp is adapted to remove ligament tissue. Alternatively or additionally, said rasp is formed of metal. Alternatively, said rasp is formed of a bioabsorbable material.

25 In an exemplary embodiment of the invention, a plurality of rasp elements are defined on said rasp. Optionally, said elements are defined by etching. Alternatively or additionally, said elements are defined by punching.

In an exemplary embodiment of the invention, a plurality of rasp elements are attached to said rasp.

30 In an alternative embodiment of the invention, said rasp comprises a cable. Alternatively, said rasp comprises a chain.

In an exemplary embodiment of the invention, said rasp elements are adapted to guide removed tissue away from the tissue on which the rasp is working.

In an exemplary embodiment of the invention, said rasp elements are adapted to retain removed tissue.

In an exemplary embodiment of the invention, the apparatus comprises a source of cleaning fluid, adjacent said rasp. Alternatively or additionally, the apparatus comprises a
5 source of vacuum, adjacent said rasp.

In an exemplary embodiment of the invention, said rasp has a total length selected to be substantially sufficient for a spinal stenosis removal procedure. Alternatively or additionally, said rasp has a total length of between 0.5 and 4 meters. Alternatively or additionally, said rasp has a total length of between 1 and 3 meters.

10 In an exemplary embodiment of the invention, said rasp has an active length defined by a distance between said tips. Alternatively or additionally, said active length is adjustable by adjusting a distance between said tips. Alternatively or additionally, said active length is sufficient to span between one and ten vertebra of a adult human. Alternatively or additionally, said active length is sufficient to span between two and eight vertebra of a adult human.
15 Alternatively or additionally, said active length is sufficient to span between three and four vertebra of a adult human.

In an exemplary embodiment of the invention, said extensions are sufficiently long to extend from a body surface to a spinal channel of a adult human. Alternatively or additionally, the apparatus comprises a rasp advancer for advancing said rasp in a single direction.
20 Alternatively or additionally, the apparatus comprises a rasp advancer for reciprocating said rasp.

In an exemplary embodiment of the invention, said apparatus comprises at least two parts, separable such that said first and said second extensions are in separate parts during a normal use of said apparatus. Alternatively or additionally, the apparatus comprises means for
25 affixing said apparatus to a vertebra. Alternatively or additionally, the apparatus comprises a spring for setting a tension in said rasp. Alternatively or additionally, the apparatus comprises a spring for setting a surface pressure of said rasp against a working surface. Alternatively or additionally, the apparatus comprises a gauge for measuring a tension in said rasp. Alternatively or additionally, the apparatus comprises a leader attached to one end of said rasp,
30 which leader is adapted for inserting through a spinal channel.

There is also provided in accordance with an exemplary embodiment of the invention, apparatus for spinal stenosis treatment, comprising:

means for guiding a rasp through a part of a spinal channel defined by at least one vertebra;

means for holding said rasp on either side of said part of a channel and outside a human or animal body including said vertebra; and

means for moving said rasp to remove a spinal stenosis in said spinal channel.

BRIEF DESCRIPTION OF THE DRAWINGS

Some embodiments of the present invention will now be described with reference to the following description of exemplary embodiments thereof in conjunction with the figures, wherein identical structures, elements or parts which appear in more than one figure are labeled with a similar numeral in all the figures in which they appear, in which:

Figs. 1A and 1B illustrate a vertebra in top and side views respectively, illustrating common types of spinal stenosis;

Fig. 2 is a schematic side illustration of the deployment of a bone removal device in a spine, in accordance with an exemplary embodiment of the invention;

Figs. 3A-3C schematically illustrate stages in the deployment of the device of Fig. 2, in accordance with an exemplary embodiment of the invention;

Figs. 4A-4E illustrate several profiles of a rasp, in accordance with exemplary embodiments of the invention;

Figs. 5A-5E illustrate various types of rasping surfaces, in accordance with exemplary embodiments of the invention;

Fig. 6A and 6B illustrate details of elbows of the device of Fig. 2, in accordance with exemplary embodiments of the invention;

Fig. 7 illustrates trans-axial navigation of a rasp by pivoting the device of Fig. 2 on the body, in accordance with an exemplary embodiment of the invention;

Fig. 8A is a side view of a detailed embodiment of a bone removal device, similar to the device of Fig. 2, in accordance with an exemplary embodiment of the invention; and

Fig. 8B is an isometric view of the device of Fig. 8A.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Fig. 2 is a schematic side illustration of the deployment of a bone removal device 200 in a spine 130, in accordance with an exemplary embodiment of the invention. Device 200, in an exemplary embodiment of the invention, comprises generally of a rasp provider 206, a rasp take-up 208 coupled to it via a connector 214 and a rasp 202 which passes from the provider 206, through spine 130 and to take-up 208. Optionally, device 200 includes a handle 210 and at least one control 212, for example an on/off switch. A pair of rasp elbows 204 are optionally provided to guide rasp 202 at a proper angle through spinal channel 106. In Fig. 2, two types of stenosis are shown, articulated processes stenosis 120 (several shown) and laminar stenosis

122 (one shown). In an exemplary embodiment of the invention, one or both types of stenosis causing protrusions are removed, possibly selectively, as described below, thereby increasing the cross-section of the spinal channel.

5 In an exemplary embodiment of the invention, rasp 202 is guided by elbows 204 so that its cutting surface (see below Figs. 4A-4E) is parallel to the portions to be removed. In some cases this may require rotating the rasp around the axis of the spine. In an exemplary embodiment of the invention,, such rotation is provided by elbows 204, for example by the elbows rotating or having two or more channels for guiding the rasp. When the rasp is inserted into the body, the angle of bend at the elbow is optionally 90°, so that the rasp is parallel to the spine axis. In some cases, it may be desirable to have a different angle, for example between 70° and 90° or between 90° and 110°. Alternatively or additionally, a two step bend may be provided, for example to better match the anatomy.

Device 200 may be employed in many parts of the spine, including the lumbar region and the cervical region.

15 Figs. 3A-3C schematically illustrate stages in the deployment of device 200 of Fig. 2, in accordance with an exemplary embodiment of the invention. In a typical procedure, rasp 202 is guided through the spinal channel 106 and then the take-up 208 and provider 206 are connected. Alternatively, take-up 208 and provider 206 are interconnected during the insertion process or pre-connected (or even a single element to begin with) and once rasp 202 is guided through the body it is inserted into take-up 208. Figs. 3A-3C illustrate one family of possible methods of guiding rasp 202 through channel 106, in other embodiments of the invention, other methods may be practiced. Although entry and exit between vertebrae is shown, in some cases entry and/or exit through a vertebra may be desirable. Further, in some cases the entry and exit are at the midline of the spine. However, in others the entry and/or exit may be off the midline, possible on opposite sides of the midline.

25 In Fig. 3A, an incision 220 is formed between a skin 222 and an entry area 224 into the spinal channel. A guide wire or a soft catheter 226 is optionally inserted through the incision and into the spinal channel. In some embodiments of the invention, incision 220 is formed using an endoscope or a rigid hollow tube, such as a cannula or a needle. In others, a standard surgical incision is formed.

30 In Fig. 3B catheter 226 is advanced along-side the spinal cord, inside the spinal channel.

In Fig. 3C, catheter 226 is removed from the spinal channel, for example, as shown using a grasping tool 230 inserted through a second incision 228. Alternatively or additionally,

a second endoscope (with a grasping tool) is used to remove the catheter. In an exemplary embodiment of the invention, the tip of catheter 226 is marked to make it easier to locate in the incision 228. Such marking can include color, radiant marking such as a blinking LED or an RF transponder, vibration, a unique shape such as a hard sphere, or other means, for example means known in the art for locating objects in a body and especially in a surgical incision. Alternatively or additionally, an automatic guidance system may be used, for example with the catheter tip being magnetic or attracted to a magnet or using a position sensor mounted at the tip of the catheter. Alternatively or additionally, a stylet is inserted into catheter 226, to aid in pushing it out of the body. Alternatively or additionally, catheter 226 includes a lumen for a retractable sharp tip, which can be extended to cut the tissue ahead of the catheter. Alternatively or additionally, an extendible eye (or other anchor) is provided, for the grasping tool (see below) to grasp. Possibly, the leading edge of the anchor is sharp, to perform cutting.

Once catheter 226 exists through incision 228, it may be pulled to thread an attached rasp 202 through the spinal column.

Once the use of rasp 202 is completed, the rasp may be pulled forward or backwards so that it leaves the body. Alternatively, the rasp may be cut at any point along its length. Possibly a catheter is inserted into the body in order to cut the rasp.

In some cases, it may be useful to enter at a lower part of the spine and exit at a higher part of the spine. In others, entry is at a higher part and exit at a lower part of the spine. Although a soft catheter is described, in some cases a steerable catheter may be desirable. Alternatively or additionally, the catheter may include an imaging and/or other type of sensor to aid in avoiding damage to the spinal cord while advancing the catheter. Alternatively or additionally, the catheter may have non-uniform bend resistance, for example to prevent twisting of the catheter or bending of the catheter out of the plane of the rasp. In a particular example, the catheter has a rectangular profile. Alternatively or additionally, stiffening spines (or other structural elements) are provided along one transaxial dimension of the catheter and not along the other. Alternatively or additionally, selective weakening of the catheter structure is performed along the other transaxial dimension.

In an exemplary embodiment of the invention, the motion of rasp 202 is one directional. Alternatively, the motion of rasp 202 is reciprocating. Possibly, the motion is a combination of a slow advance in one direction and reciprocating motion, thus, "used" rasp portions are slowly cycled out of the spine. In reciprocating motion, the rasp can remove bone tissue on both the forward and the backwards stroke. Alternatively or additionally, only one of the strokes removes bone, for example only the forward stroke or the backward stroke.

Possibly, the other (or both) the strokes remove soft tissue, either exclusively or additionally to removing bone. This selectivity maybe achieved, for example by the design of the rasp or by alternating slow and fast motion of the rasp for the different stroke directions. In another example, the tension in the rasp (for a flexible rasp) is reduced for one of the stroke directions, to reduce the rasping effect of rasp 202.

Alternatively or additionally to linear motion of the rasp, in some exemplary embodiments of the invention the rasp rotates around its axis. If the rasp is twisted or suitably ribbed, this can have the effect of a spiral motion. Alternatively or additionally, a spiral motion is effected by a simultaneous advance and rotation of the rasp.

In an exemplary embodiment of the invention, the motion of the rasp is continuous, except where stopped by the user (or by a safety mechanism). Alternatively, pulsed motion is used. one example of pulsed motion is to activate the rasp for a fixed number of cycles, pre activation pulse. Another example of pulsed motion is to move the rasp a fixed distance for each activation pulse.

In an exemplary embodiment of the invention, the spine is bent and/or straightened so that the rasp is in proper contact with the protrusions to be removed. One method of bending the spine is to place pillows under a stomach of a patient, possibly using feedback from an X-ray image. A set of suitable pillows may be provided in a kit from with the rasp. Possibly, inflatable bladders are used for the pillows. Possibly the bladders are single use bladders. Another method of bending the spine is to apply traction to the spine, while the patient is in horizontal or a vertical orientation. Alternatively or additionally, other methods and devices, such as known in the art, may be used to bend the spine.

In one exemplary embodiment of the invention, all the stenosis locations along the rasp are treated simultaneously. Alternatively or additionally, after a first rasping step, only those locations which are not thinned enough by the rasping are rasped again, in series or in parallel. This may require modifying the rasp or moving pillows.

Figs. 4A-4E illustrates several profiles of a rasp, in accordance with exemplary embodiments of the invention. Fig. 4A shows an exemplary, rounded, profile 232. Fig. 4B shows an exemplary, rectangular, profile 234. Other profiles may be used as well, for example a convex or a concave arc. The profile of Fig. 4A, for example, may be moved axially and/or rotated around its axis for removing bone tissue, depending on the type of device used.

The profile may be constant along the rasp. Alternatively the profile may vary along the rasp. In one example, the profile remains relatively constant for long stretches of the rasp and then changes, for example, to support a two step rasping procedure - first rough rasping

and then fine rasping or first a rasp adapted to remove ligament and then a rasp adapted to remove bone. In another example the profile varies locally, for example alternating fine and rough rasping elements, to achieve a particular effect of the rasp on the bone. In another example, the profile varies so as to form grooves in the rasp for the debris of the rasping to travel along. Optionally, such grooves lead the debris into a storage compartment adjacent the rasp or forward, out of the body.

The profile is optionally symmetric relative to the axis. However, in some embodiments, an asymmetrical profile may be used, for example to better anatomically fit the triangular cross-section of the spinal channel. Alternatively or additionally to axial or trans-axial profile variations, the profile may vary in that its thickness varies along the length of the rasp. In some embodiments of the invention, the variations in profile are effected by the rasp having ribs or a thread.

Fig. 4C illustrates an exemplary embodiment of the invention, in which embodiment a shield 236 is used in conjunction with rasp 234 to prevent the rasp from damaging the spinal cord and/or root nerves. Possibly, the shield also serves as a channel for guiding the motion of the rasp. In some embodiments of the invention, the shield is curved, thus guiding the rasp along a curved path. The shield may be relatively rigid or it may be flexible like the rasp itself. In some cases, the shield is formed on the back of the rasp, for example as a smooth surface. In an exemplary embodiment of the invention, the shield does not move with the rasp. Alternatively, both move, but possibly at different rather than same speed and/or direction.

In an exemplary embodiment of the invention, the shield is inserted before the rasp. Alternatively, they are both inserted at the same time. Alternatively, the shield is inserted after the rasp, for example being guided along it. Possibly, a lumen of a catheter or an endoscope is used to guide the shield into the body. Alternatively to being advanced along the channel, the shield (and the rasp, if inserted separately from catheter 226) may be retracted along the channel. In some embodiments of the invention, especially where the shield is curved, the shield may be formed of an elastic, super-elastic or shape-memory material, so that it can be inserted in one shape and then it changes to a different shape.

In an exemplary embodiment of the invention, the shield serves to collect debris generated by the rasp and prevent the debris from entering the spinal channel. Possibly, the shield encloses the rasp from more than three sides. Fig. 4D shows such a rasp profile, in which a rasp portion 235 is surrounded by a shield 237 from substantially all sides except for a window 231.

grate the bone, or to remove thin chips, for example, 0.1, 0.5 or even 1 mm. The rasp surface, aside from the rasp elements may be, for example smooth. In other embodiments, the rasp surface is rough.

In another particular example, a thin layer having rasping elements formed therein is attached, for example using spot welding, to a rasp backing layer, to form the final rasp. Each of these two layers may be formed of a different material.

In Fig. 5C, a rasp section 248 has a plurality of rasp elements 250 attached thereto, formed, for example by soldering. As shown by a reference 52, a side cut through view, the rasp has different forward and backwards profiles which translate as different amounts resistance to the different motion directions. Alternatively to soldering, rasping elements may be attached to rasp 202 in a variety of ways, including spot welding, gluing, applying pressure or any other method of attaching an element to a surface known in the art. The rasping elements may be formed of a same or a different material as rasp section 248.

In Fig. 5D, a plurality of rasp elements 254 are aligned to describe V shapes on a rasp section 253. Alternatively, each of the "V"s is formed of a single tissue removal element. A possible advantage of the "V" shape is that the rasp may be less likely to move sideways while in action. Alternatively to a "V" shape, a "W" shape or a wave shape may be provided. Alternatively or additionally, sets of rasps, having different orientations may be used.

In Fig. 5E, rasp elements 256 are arranged to be slanting to one side on a rasp 255. A profile of the rasp is shown as reference 257. Transaxial movement of such a rasp may be avoided, for example, by properly shaping individual rasp elements which form the slanting elements or by rigid grasping of the elbows 204.

Alternatively or additionally, to formed rasp elements, rasp 255 (for example) may comprise a chain, a cable or a single wire. Possibly, a second wire is spirally mounted on the first wire, to present a rasping surface. In an alternative embodiment, the rasp is a saw with suitably small teeth.

The various properties of the rasping element, as well as their spatial distribution, relative size and orientation may vary axially and/or trans-axially along the rasp, for example as explained above with respect to rasp profile.

In an exemplary embodiment of the invention, the rasp is straight. However, in some exemplary embodiments of the invention, the rasp is curved, for example trans-axially parallel to the plane of device 200 or trans-axially perpendicular to the plane of device 200. This curving may be achieved, for example using a suitably shaped shield 236. This can be achieved in various ways, for example, the shield may be pre-shaped (e.g., shape memory),

may be shaped by the insertion process (the elbows) or may be distortable, for example being inflatable or including pull-wires and/or selective weakening so that when force is applied the shield distorts in a desirable manner. Alternatively or additionally, rasp 202 (or the shield layer) may have a suitable resting condition, for example being a shape memory material, a super elastic material or an elastic material, at least having these properties in the direction of the bend. A single bend may be utilized or the rasp can be substantially freeform with any number of bends defined therein. In an exemplary embodiment of the invention, the bends in the rasp are used to make the rasp conform to a particular inner geometry of the spinal column, for example if the vertebrae are not properly aligned, or for conditions of bent backs.

In an exemplary embodiment of the invention, device 200 includes a pathway for inserting an endoscopic viewer into the spinal column to view the location of the rasp and its effect on the bone. Optionally, the endoscope is inserted while the rasp is inside the body. Alternatively, the rasp is first removed, possibly leaving a guide wire in the body for easy reinsertion of the rasp, if required.

Alternatively or additionally, device 200 includes a pathway or a lumen for providing vacuum and/or positive pressure (e.g., for irrigation) into the spinal column, for example to aid in removing debris caused by the rasping or to aid in separating the various tissues.

Fig. 6A and 6B illustrate details of elbows 204 (Fig. 2) in accordance with exemplary embodiments of the invention. In Fig. 6A, a rotating elbow element 260 is shown in which one or more grooves 262 are formed to accommodate rasping elements. These rasping elements are optionally arranged in rows to facilitate their matching such grooves. In Fig. 6B a fixed slip-element 268 is shown, across which element rasp 202 slips. In a side view shown as 264 a plurality of grooves 266 are shown to receive rows of rasping elements. It is noted that in an exemplary embodiment of the invention, elbows 204 can serve to protect the entry and exit point in the spinal column from undue abrasion.

An optional lumen 270 is shown; such a lumen may be used, for example, for the provision of an endoscopic viewer, a vacuum (for debris removal) or irrigation (for debris removal, cooling and/or friction reduction) into the spinal channel. In some cases, lumen 270 may be at the side of the rasp instead of between the rasp and the bone, as shown. Alternatively or additionally, the lumen may be formed in the rasp or in the shield.

The insertion of device 200, as well as the process of rasping may be performed using any one of the known imaging methods, including, CT, MRI, X-ray, fluorography, angiography, ultrasound and vision (optionally using an endoscope). Possibly, two imaging modalities may be combined or different modalities used for different parts of the procedure,

for example x-ray for inserting the rasp and an endoscope for monitoring the rasping process. In an exemplary embodiment of the invention, ultrasound is used to estimate the thickness of the bone, at the point where bone is removed. Various imaging modes can be used, including regular imaging, calculation of velocity in the bone (which velocity is affected by thickness),
5 attenuation measurement and distance measurement (optionally from a fixed position in the spine). In one embodiment the ultrasound is applied from inside the body, from inside the spinal channel. Alternatively, the ultrasound is applied from outside the body. Possibly, an ultrasound transducer used for measurement, is integral with the protector or the rasp.

There are several types of intra-body navigation that can be considered in a context of a
10 rasping procedure as described herein:

(a) navigation of catheter 226 into an out of the spinal column, at the correct locations and without damaging the spinal cord;

(b) navigation of catheter 226 along the spinal channel, avoiding twisting around the spinal cord and damaging branching nerves and/or blood vessels; and

15 (c) trans-axial navigation of the rasp for removing different parts of the cross-section of the lumen of the spinal channel.

Fig. 7 illustrates trans-axial navigation of rasp 202 by pivoting device 200 around incisions 220 and 228. When device 200 is moved to one side of the spinal midline (as shown by a dotted element 201), the body tissue serves as a pivot which causes the rasp to move to
20 the other side of the spinal midline. The extent of this effect depends, inter alia, on the type of incision (wide, narrow), whether there is a sheath in the incision (e.g., an endoscope) and on the distance of device 200 from the spinal column. Alternatively, this pivoting is provided by a suitably shaped elbow 204. In one example, the elbow is fixed relative to the spine, however it supports sliding of rasp 202 in a trans-axial direction or rotates axially (around the spine axis),
25 so that rasp 202 moves in a trans-axial direction.

One advantage of elbows 204 being fixed relative to the spine is that it confers stability on the location of the rasp in the body, in spite of the considerable and varying pressures exerted on the rasp in various directions.

One issue to be considered in the removal of waste material. It should be noted that the
30 type and size of the particles of the debris depend on the type of rasp elements and the power profile of the rasping activity. In addition, the type, age and disease state of the tissue may also affect the particle sizes. These parameters are optionally matched to the debris removing method selected.

In an exemplary embodiment of the invention, the debris is collected in rasp 202 itself, for example in the hollows of the rasping elements themselves or in a container formed inside rasp 202. The amount or required collections pace depends, inter alia, on the number of times a single element will come in contact with bone and on the amount of bone it removes each time.

Alternatively, the debris is collected between the rasp and the shield layer or in a container formed in the shield layer.

The collected debris may be removed by the forward movement of the rasp, as it advances out of the body. Alternatively or additionally, the debris may be removed by the rasp effecting a spiral motion which pumps the debris out of the body (possibly even uncollected debris). Alternatively or additionally, the debris may be flushed out or sucked out by suitable providing positive or negative pressure at the entry and exit holes or along the rasp. Alternatively or additionally, the container is periodically removed for cleaning.

Another issue to be considered is the provision of a desired pressure between the rasp surface and the bone to be removed. In an exemplary embodiment of the invention illustrated in Fig. 8A, a constant pressure is maintained by fixing device 200 to the spine and providing a spring between the device and the rasp, to control the pressure.

The above description has focused on removing bone. However, it should be noted that in many cases ligament 110 is removed instead of or in addition to bone. The selective removal of one tissue type may be affected in some exemplary embodiments of the invention, for example, by suitably selecting the rasping elements, the rasp profile, rasp placement, rasp-tissue pressure, rasp speed and/or power application profile. It should be noted that in some cases the ligament is removed first, before reaching the bone. In some applications, the rasp may be inserted between the ligament and the bone, to selectively remove the bone without removing the ligament or removing only the bone-facing portion thereof and not the spinal cord facing portion thereof.

Another issue to be considered in some exemplary embodiments of the invention is the provision of feedback of the rasping process, to assess its progress and/or to prevent damage to sensitive tissues.

A basic form of feedback uses one of the imaging modalities mentioned above, or any other modality, to directly image the desired parameter, e.g., the rasp location, amount of bone removed, damage to the spinal cord, etc. Alternatively or additionally, a mechanical measurement method, such as a caliper, may be used.

Alternatively or additionally, other methods of feedback may be used. In one exemplary embodiment of the invention, the thickness of tissue removed is estimated based on parameters of the rasping, for example, the length of time for which the rasp was activated, the pressure applied between the rasp and the tissue, the length the rasp has advanced, the tissue
5 type and/or the amount of tissue removed. Alternatively or additionally, a trans axial motion of the rasp can be measured, using the device of Fig. 8A (e.g., spring 334).

Alternatively or additionally, a color based method can be used. In one variation of this method note is made of the color of removed tissue, and based on the ratio between bone and ligament in the removed tissue, of the thickness of tissue removed, is estimated. Alternatively
10 or additionally, the amount of blood flow is used to estimate the type of tissue being removed. In another variation, the tissue to be removed is stained, over its surface and possibly to a desired depth and note is made of the color of removed tissue. The tissue may be stained, for example, by a first length part of the rasp or by an endoscope or catheter 226 used for this purpose. Alternatively or additionally, to checking the color of removed tissue, a monitoring of
15 the color of remaining tissue may be used, for example using an endoscope or possibly even using a frequency selective photo-sensor mounted inside the body, for example, on one of the elbows or on the shield.

Referring back to Fig. 2, it is noted that the stenosis causing artifacts are often localized. Thus, once the tissue at these areas is removed, a change in the resistance
20 characteristics of the tissue can be expected and/or monitored for. It is expected that bone, ligaments and blood vessel tissue all exhibit different type of resistance profiles to motion of a rasp. In any case, if the rasp engages more than a certain percentage of the spinal column a safety hazard can be decided and the operation stopped automatically.

In a related method, it is noted that once these stenosis causing locations are treated,
25 the displacement of the rasp will change significantly. The amount of displacement or the rate of change of displacement may also be used to estimate the thickness of tissue removed.

In another method, the amount of tension in the rasp is monitored. In an exemplary embodiment of the invention, when a sudden change in tension is detected a break in the rasp is determined, and the power stopped. Alternatively or additionally, if the amount of tension at
30 either end of the rasp is significantly different from the other end, a determination that the rasp is stuck may be made.

In another method, the operation is stopped periodically so that a doctor can obtain tactile or audio feedback, for example by moving the rasp manually.

In another method, the rasp elements are degraded as they are used, once a certain part of the rasp has removed a certain amount of bone, all the rasp elements at that part are smoothed and that rasp portion does not cause any more tissue removal. Alternatively or additionally, the rasp may include a portion which is degraded as the rasp is used, and the thickness and/or opacity of that portion examined to assess the amount of tissue removed.

In some exemplary embodiments of the invention, safety mechanisms are provided to avoid nerve damage. In an exemplary embodiment of the invention, measurements of evoked potential are carried out on the branching nerves, to determine changes in pressure caused by the spinal stenosis. Alternatively or additionally, conduction velocity in the nerves may be measured to monitor the reduction in stenosis and/or damage caused by the treatment. In an exemplary embodiment of the invention, prior to measurement the rasp is rotated around the axis of the spine to a location where there is more room, so that the rasp itself does not exert pressure on the spine. Alternatively or additionally, the rasp includes a pressure sensor at its back and/or the back of the shield, so that the contact pressure between the rasp and the spinal cord can be monitored.

Fig. 8A is a side view of a detailed embodiment of bone removal device 300, similar to device 200, in accordance with an exemplary embodiment of the invention. Fig. 8B is an isometric view of device 300, omitting some elements. Device 300 comprises a rasp providing unit 306 which provides a rasp 302 from a rasp reel 322, along an insertion extension 318 to a first elbow 304 and then to a removal elbow 304', along a removal extension 320 and to a rasp uptake reel 324 which forms part of a rasp take up unit 308. Providing unit 306 and take-up unit 308 are optionally interconnected using connector 314, which can control the distance between the take-up and the providing units. This distance can be used to directly control the length of spinal column treated or, if extensions 318 and/or 320 can be angled, as in some exemplary embodiments of the invention, to indirectly control this length.

A handle 310 and possibly a perpendicular handle 326 are provided to allow a physician to hold the device in a stable manner. Alternatively, device 300 may be fixed relative to the patient and/or a patient bed.

In an exemplary embodiment of the invention, a bone rest 330 is provided, so that device 300 can rest directly against the bone. Alternatively or additionally, a back rest is provided so the device rests against the skin of the back of the patient. In an exemplary embodiment of the invention, bone rest 330 expands radially, so that it can be easily inserted into a narrow incision. Alternatively other solutions may be provided, for example the bone rest may fold or a larger incision used. In an exemplary embodiment of the invention, bone

rest 330 includes retractable spikes (not shown) for engaging the vertebra). Alternatively or additionally, bone rest 330 matches the anatomy of the vertebra to assist in achieving a stable resting configuration.

In an exemplary embodiment of the invention, elbows 304 are attached to device 300 using a spring 334, which controls the pressure exerted by rasp 302 against the spinal column. In an exemplary embodiment of the invention, a screw or other element 336 is provided for controlling the tension in the spring. Optionally, when the device is inserted a low or null tension is provided and once the bone rests are in place, the spring is activated. Possibly, a sensor 332 is provided to determine proper contact between bone rest 330 and the spine. Possibly, device 300 is inactivated if a low and/or high contact pressure is detected. Alternatively or additionally, a sensor 338 is provided to measure the tension in the spring and/or to measure displacement of elbow 304 relative to bone rest 330. In an exemplary embodiment of the invention, two such bone rests are used, even though only one is shown. In other embodiments, only one bone rest is used.

In an exemplary embodiment of the invention, catheter 226 is threaded on take-up reel 324 after it passes through the spinal channel. Alternatively rasp 302 is directly threaded on the take up reel.

In an exemplary device, rasp 302 is 5 meters long, 4 millimeters wide and between 0.05 and 0.15 millimeters thick. The motion is reciprocating at an amplitude of 2 millimeters and a frequency of 1 Hz and the rasp advances at a speed of 1 meter a minute. In this example, the AC motion magnitude is significantly greater than that of the DC motion. In other embodiments, the magnitudes may be similar or the DC motion may be smaller.

In an exemplary embodiment of the invention, the rasp material is metallic, for example stainless steel. Alternatively or additionally, at least the rasp elements are formed of plastic. One advantage of plastic is that it can be made bio-absorbable so that any pieces which chip off are rapidly absorbed and do not cause mechanical damage or promote infection. Alternatively or additionally, the rasp is formed of a cloth material, possibly with abrasive material glued on. One possible advantage of cloth is an increased resistance to tearing and/or other types of mechanical failure.

In an exemplary embodiment of the invention, parts of device 300 are made for a single use and/or for a single patient. In one exemplary embodiment, the entire device is a one-time device. In another exemplary embodiment only rasp 302 is one time and is provided, for example packaged with a providing reel 322 or with an entire providing unit 306. In another exemplary embodiment, all the portions which come in contact with body fluids are disposable

In an exemplary embodiment of the invention, especially when selective rasping is performed, an image guided procedure is used in which the position of the rasp relative to the tissue to be removed is shown. The image is optionally coupled to the rasp device, possibly simplifying coordinate registration problems however, this is not required. The rasp optionally
5 includes markers which enable the axial position of the rasp to be determined from the image, however, this is not required.

Alternatively or additionally, the position of the rasp is determined using an optical encoder or a different type of encoder on the rasp or on one or both of the reels.

In an exemplary embodiment of the invention, the rasp position determination is
10 utilized by a controller to match desired variations in rasp structure and/or rasp movement to a particular situation. Optionally, an image or scheme of the spine showing what is to be removed is first entered into the computer, to plan the procedure, however, this may also be done in real time. Alternatively or additionally, to computer control, manual "fast forward", "reverse" and "activate" buttons may be provided, as well as controls to vary selected ones of
15 the myriad of available parameters.

The rasping process itself may proceed as a single extended step in which a single type of activity is performed until the desired rasping effect is achieved. Alternatively, a multi-step process may be used, for example first rough rasping and then fine rasping or rasping one vertebra at a time (even though all the vertebra are threaded by the rasp) or first removing
20 ligament and then removing bone.

Alternatively or additionally, once the rasping is completed, the availability of the rasp threaded in the body may be used to treat the rasped area, for example using radioactivity or heat (to prevent re-growth) or by applying pharmaceuticals, such as healing promoters. These materials may be attached to the rasp itself or may be guided along or over the rasp and/or the
25 shield, for example using one or more catheters or endoscopes.

In an exemplary embodiment of the invention, the rasp is cooled (inside the body) or pre-cooled (prior to being inserted into the body. This cooling can be used to counteract the friction heating of the rasp. Alternatively or additionally, the cooling can be used to affect the tissue structure and assist in tissue removal and/or in the selectivity of tissue removal. Thus,
30 the cooling may be towards the bone or towards the nerve. Possibly the rasp include a material with a high thermal coefficient, so that the cooling effect is maintained. Alternatively or additionally, the rasp or the shield include insulation, to block the heat from reaching the spinal cord. Alternatively or additionally, to cooling, heating may be applied, for example to counteract excessive cooling. Possibly, the motion of the rasp is made responsive to its

temperature, which may be measured in the body or after it leaves the body. Alternatively or additionally, a cooling liquid is provided in the spine. The temperature of this liquid may be monitored to prevent adverse effects of heating.

5 In some exemplary embodiments of the invention, a support mesh or another type of membrane is provided over the rasped area, for example to promote healing or to prevent adhesion.

10 In an exemplary embodiment of the invention, the power for moving the rasp is provided at the take-up reel. Possibly, the power is electric, pneumatic or hydraulic. Alternatively or additionally, the power is manual, being applied by a physician, for example, either by turning the reel or by advancing the entire device 300. Alternatively or additionally, power may be provided at least partly locally, for example by providing piezoelectric materials on the rasp, which when activated, cause the rasp elements to move. Alternatively or additionally, vibration of the rasp may be affected by providing a rasp with a high Q factor, for efficient transmission of ultrasonic vibrations along the rasp, from outside the body.

15 In an exemplary embodiment of the invention, the power train includes various safety features. In one example, a clutch is provided which only releases the rasp to move if a minimum amount of rasp-bone pressure is applied or if a minimum amount of tension is achieved in the rasp. Another example is a maximum power cut-off that stops the rasp motion if the required power is above a pre-selected limit or a calculated limit.

20 Alternatively or additionally, to removing portions of the spine for treating spinal stenosis, portions of the spine may be removed for other reasons. One possible application is removing portions of the spine to aid in straightening a bent back. By allowing controlled removal of bone without major surgical incisions, less aggressive treatments than practiced today may become more prevalent. Alternatively or additionally, portions of the bone on the outside of the spine may also be removed and/or grooves formed therein, for example to assist in bending of the spine.

25 Alternatively or additionally, a similar device may be used for removing bone portions from outside the spine. Instead of the rasp pointing towards the device, the rasp (and/or a shield thereof) can be twisted 90° or 180° around its axis so that it points away from the device. Such a modified device can still be used without a major incision. Alternatively or additionally, such a device may be used for forming grooves (straight or curved) in other bones, such as a femur. When forming such a groove, a two step process may be used. In a first step a deep narrow groove is formed and the rasp inserted therein. In a second step, the rasp is rotated or expanded (or a wider rasp provided) so that a wider diameter groove is formed at the base of

the narrow groove.

Alternatively or additionally, minimally invasive removal of bone may be practiced, for example to aid in straightening bent bones (e.g., a femur), for applying bone plates to broken bones, with a better conformity to the bone geometry (possibly along the path of the rasp) and/or for corrective surgery of deformed complex joints, such as wrists and ankles, where a plurality of bones need to be reshaped to match against each other. In some of these applications it may be useful to provide a bone drill and/or a rotary rasp, alternatively or additionally to a linear rasp. In an exemplary embodiment of the invention, the rasp is deployed inside an intra-medullar space of a bone with the rasp pointed in the direction of the device, to the side or even away from it.

In an exemplary embodiment of the invention, a portion of vertebral bone may be removed with a minimal compromising of the surface of the vertebrae, inside the spinal channel and/or outside of it. A bore may be drilled in the vertebra, from between two vertebrae along a path which does not intersect with the surface of the vertebra. The removal of the bone softens the vertebra, so that inflating a device inside the spinal channel and/or otherwise applying pressure against the vertebra from inside will increase the radius of the spinal channel. Alternatively, after the bone bore is removed, the inside of the bore is hooked and retracted, to cause it to collapse. Thus, there may be less danger of inflammation adjacent the spinal column. In an exemplary embodiment of the invention, the tool used for boring comprises a drill and/or a rasp.

In the above description, an entry-exit device has been described. However, in some exemplary embodiments of the invention a single hole device is used, which is inserted into the spine as in Figs. 3A and 3B and then activated, without requiring the rasp to exit the body as in Fig. 3C. In one example an extension 318 can be extended into the spinal channel and the rasp run along it. One type of suitable rasp is a self-engaging rasp, in which the rasp elements, once in contact with the bone, engage the bone to a greater extent, reducing the need to apply external pressure to maintain proper contact between the rasp and the bone. In addition, higher motion frequencies may be used. One suitable type of rasp motion is reciprocating. Possibly, the rasp is arranged like a conveyer belt, so that used parts of the rasp exit along the same path that they used to enter the body, optionally separated from the spinal cord by a shield layer. Alternatively or additionally, rotational motion of the rasp may be used for removing bone.

Such a one-sided device may be especially useful for treating stenosis of the branching nerve channels. In an exemplary embodiment of the invention, a rigid shield is provided to protect the branching nerve. Possibly, the shield has a form adapted to the anatomy of the

channel. The rasp is optionally a rotational rasping device.

It will be appreciated that the above described methods of removing spinal blockages and the various apparatus described may be varied in many ways. In addition, a multiplicity of various features, both of methods and of devices have been described. It should be appreciated
5 that different features may be combined in different ways. In particular, not all the features shown above in a particular embodiment are necessary in every similar exemplary embodiment of the invention. Further, combinations of the above features are also considered to be within the scope of some exemplary embodiments of the invention. Also within the scope of the invention are surgical kits that include sets of medical devices suitable for relieving
10 a stenosis and/or performing other parts of a surgical procedure. When used in the following claims, the terms "comprises", "includes", "have" and their conjugates mean "including but not limited to".

It will be appreciated by a person skilled in the art that the present invention is not limited by what has thus far been described. Rather, the scope of the present invention is
15 limited only by the following claims.

CLAIMS

1. Apparatus for removing bone, comprising:
a handle;
5 a first extension attached to said handle;
a second extension attached to said handle; and
a flexible rasp extending between a tip of said first extension and a tip of said second extension.
- 10 2. Apparatus according to claim 1, wherein said rasp moves axially between said tips.
3. Apparatus according to claim 2, comprising a pick-up reel for advancing said rasp between said tips.
- 15 4. Apparatus according to any of claims 1-3, comprising a shield adjacent said rasp, to prevent contact of said rasp with tissue at at least some locations along said rasp.
5. Apparatus according to claim 4, wherein said rasp has two faces, and wherein said shield protects tissue from one face of said rasp.
- 20 6. Apparatus according to claim 4 or claim 5, wherein said rasp is positioned between said shield and said handle, such that said rasp has an at least partially unshielded active face towards said handle.
- 25 7. Apparatus according to claim 4 or claim 5, wherein the relative positions of the rasp and shield with respect to said handle are changeable by rotation of at least one of the rasp and the shield around an axis connecting said tips.
8. Apparatus according to any of claims 4-7, wherein said rasp has two narrow sides and
30 wherein said shield protects tissue from the sides of said rasp.
9. Apparatus according to any of claims 4-8, wherein said shield is fixed relative to said tips.

10. Apparatus according to any of claims 4-8, wherein said shield is adapted to move axially with said rasp.

5 11. Apparatus according to claim 10, wherein said shield comprises a smooth backing on said rasp.

12. Apparatus according to claim 9, wherein said shield comprises a channel within which said rasp is positioned.

10

13. Apparatus according to claim 12, wherein said shield cooperates with said rasp to accumulate tissue removed by said rasp between said rasp and said shield.

14. Apparatus according to any of claims 1-13, comprising at least one resting point at at
15 least one of said extensions, which resting point is adapted to engage a vertebra.

15. Apparatus according to any of claims 1-14, wherein said rasp has a transaxial width narrow enough to fit inside a vertebral channel of a adult human.

20 16. Apparatus according to any of claims 1-14, wherein said rasp is less than 7 mm wide in a transaxial direction.

17. Apparatus according to any of claims 1-14, wherein said rasp is less than 5 mm wide.

25 18. Apparatus according to any of claims 1-14, wherein said rasp is less than 3 mm wide.

19. Apparatus according to any of claims 1-14, wherein said rasp is less than 2 mm wide.

20. Apparatus according to any of claims 1-14, wherein said rasp is thinner than 1mm.

30

21. Apparatus according to any of claims 1-20, wherein said rasp is thinner than 0.5 mm.

22. Apparatus according to any of claims 1-20, wherein said rasp is thinner than 0.3 mm.

23. Apparatus according to any of claims 1-20, wherein said rasp is thinner than 0.1 mm.
24. Apparatus according to any of claims 1-23, wherein said rasp is adapted to remove
5 vertebral bone.
25. Apparatus according to any of claims 1-23, wherein said rasp is adapted to remove calcifications.
- 10 26. Apparatus according to any of claims 1-25, wherein said rasp is adapted to remove ligament tissue.
27. Apparatus according to any of claims 1-26, wherein said rasp is formed of metal.
- 15 28. Apparatus according to any of claims 1-26, wherein said rasp is formed of a bioabsorbable material.
29. Apparatus according to any of claims 1-28, wherein a plurality of rasp elements are defined on said rasp.
- 20 30. Apparatus according to claim 29, wherein said elements are defined by etching.
31. Apparatus according to claim 29, wherein said elements are defined by punching.
- 25 32. Apparatus according to any of claims 1-28, wherein a plurality of rasp elements are attached to said rasp.
33. Apparatus according to any of claims 1-28, wherein said rasp comprises a cable.
- 30 34. Apparatus according to any of claims 1-28, wherein said rasp comprises a chain.
35. Apparatus according to any of claims 29-32, wherein said rasp elements are adapted to guide removed tissue away from the tissue on which the rasp is working.

36. Apparatus according to any of claims 29-32, wherein said rasp elements are adapted to retain removed tissue.
- 5 37. Apparatus according to any of claims 1-36, comprising a source of cleaning fluid, adjacent said rasp.
38. Apparatus according to any of claims 1-37, comprising a source of vacuum, adjacent said rasp.
- 10 39. Apparatus according to any of claims 1-38, wherein said rasp has a total length selected to be substantially sufficient for a spinal stenosis removal procedure.
40. Apparatus according to any of claims 1-38, wherein said rasp has a total length of
15 between 0.5 and 4 meters.
41. Apparatus according to any of claims 1-38, wherein said rasp has a total length of between 1 and 3 meters.
- 20 42. Apparatus according to any of claims 1-41, wherein said rasp has an active length defined by a distance between said tips.
43. Apparatus according to claim 42, wherein said active length is adjustable by adjusting a distance between said tips.
- 25 44. Apparatus according to claim 42 or claim 43, wherein said active length is sufficient to span between one and ten vertebra of a adult human.
45. Apparatus according to claim 42 or claim 43, wherein said active length is sufficient to
30 span between two and eight vertebra of a adult human.
46. Apparatus according to claim 42 or claim 43, wherein said active length is sufficient to span between three and four vertebra of a adult human.

47. Apparatus according to any of claims 1-46, wherein said extensions are sufficiently long to extend from a body surface to a spinal channel of a adult human.
- 5 48. Apparatus according to any of claims 1-47, comprising a rasp advancer for advancing said rasp in a single direction.
49. Apparatus according to any of claims 1-47, comprising a rasp advancer for reciprocating said rasp.
- 10 50. Apparatus according to any of claims 1-49, wherein said apparatus comprises at least two parts, separable such that said first and said second extensions are in separate parts during a normal use of said apparatus.
- 15 51. Apparatus according to any of claims 1-50, comprising means for affixing said apparatus to a vertebra.
52. Apparatus according to any of claims 1-51, comprising a spring for setting a tension in said rasp.
- 20 53. Apparatus according to any of claims 1-52, comprising a spring for setting a surface pressure of said rasp against a working surface.
54. Apparatus according to any of claims 1-53, comprising a gauge for measuring a tension
- 25 in said rasp.
55. Apparatus according to any of claims 1-54, comprising a leader attached to one end of said rasp, which leader is adapted for inserting through a spinal channel.
56. Apparatus for spinal stenosis treatment, comprising:
- 30 means for guiding a rasp through a part of a spinal channel defined by at least one vertebra;
- means for holding said rasp on either side of said part of a channel and outside a human or animal body including said vertebra; and
- means for moving said rasp to remove a spinal stenosis in said spinal channel.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 February 2001 (08.02.2001)


PCT

(10) International Publication Number
WO 01/08571 A1

- (51) International Patent Classification⁷: **A61B 17/32**, 17/16
- (21) International Application Number: PCT/IL00/00458
- (22) International Filing Date: 1 August 2000 (01.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
131197 1 August 1999 (01.08.1999) IL
- (71) Applicant (for all designated States except US):
DISC-O-TECH MEDICAL TECHNOLOGIES LTD.
[IL/IL]; Hasadnaot Street 3, 46728 Herzelia (IL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DEKEL, Assaf**
[IL/IL]; Livne Street 4/26, 60407 Neve-savyon (IL). *ILX*
- (74) Agents: **FENSTER, Paul et al.**; Fenster and Company
Patent Attorneys, Ltd., P.O. Box 10256, 49002 Petach
Tikva (IL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR SPINAL PROCEDURES

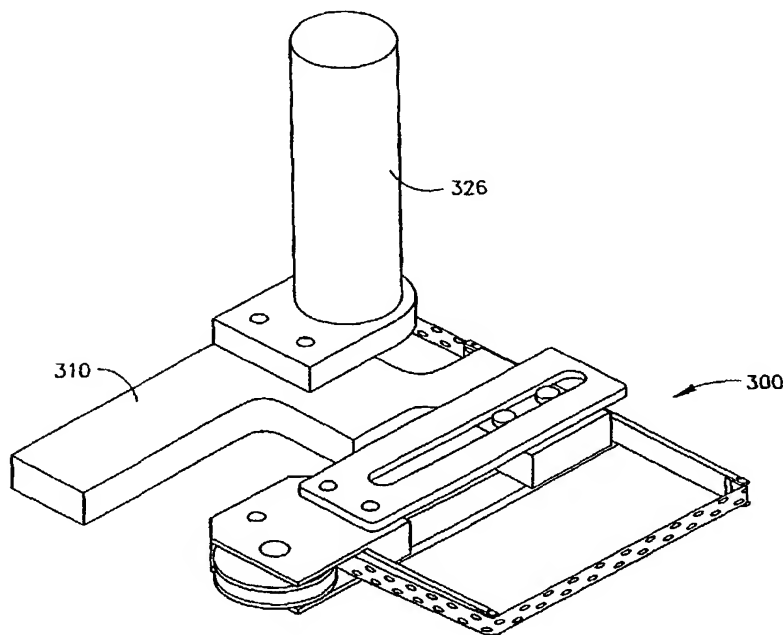

(57) Abstract: A method of treating spinal stenosis, in which a rasp is brought through a part of a spinal channel and then axially moved so that the rasp removes a stenosis in the spinal channel. Optionally, a shield protects a spinal cord or other sensitive tissues in the spinal channel.

1/8

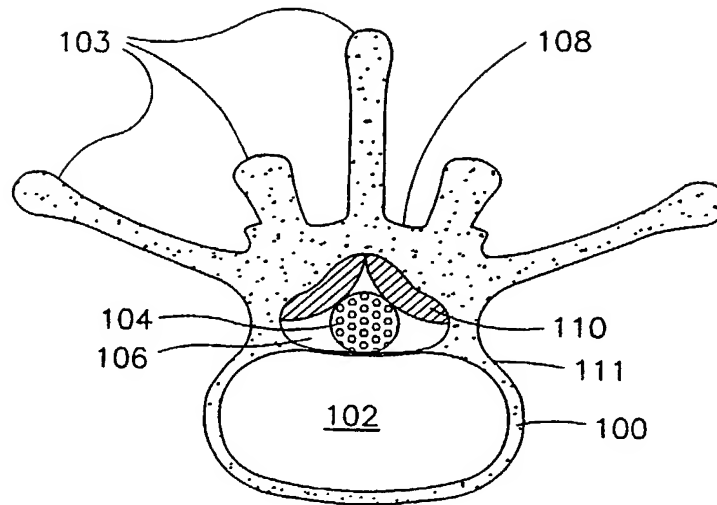


FIG.1A

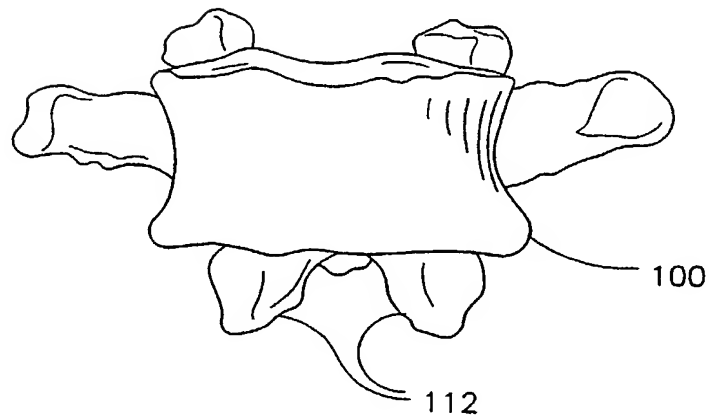


FIG.1B

2/8




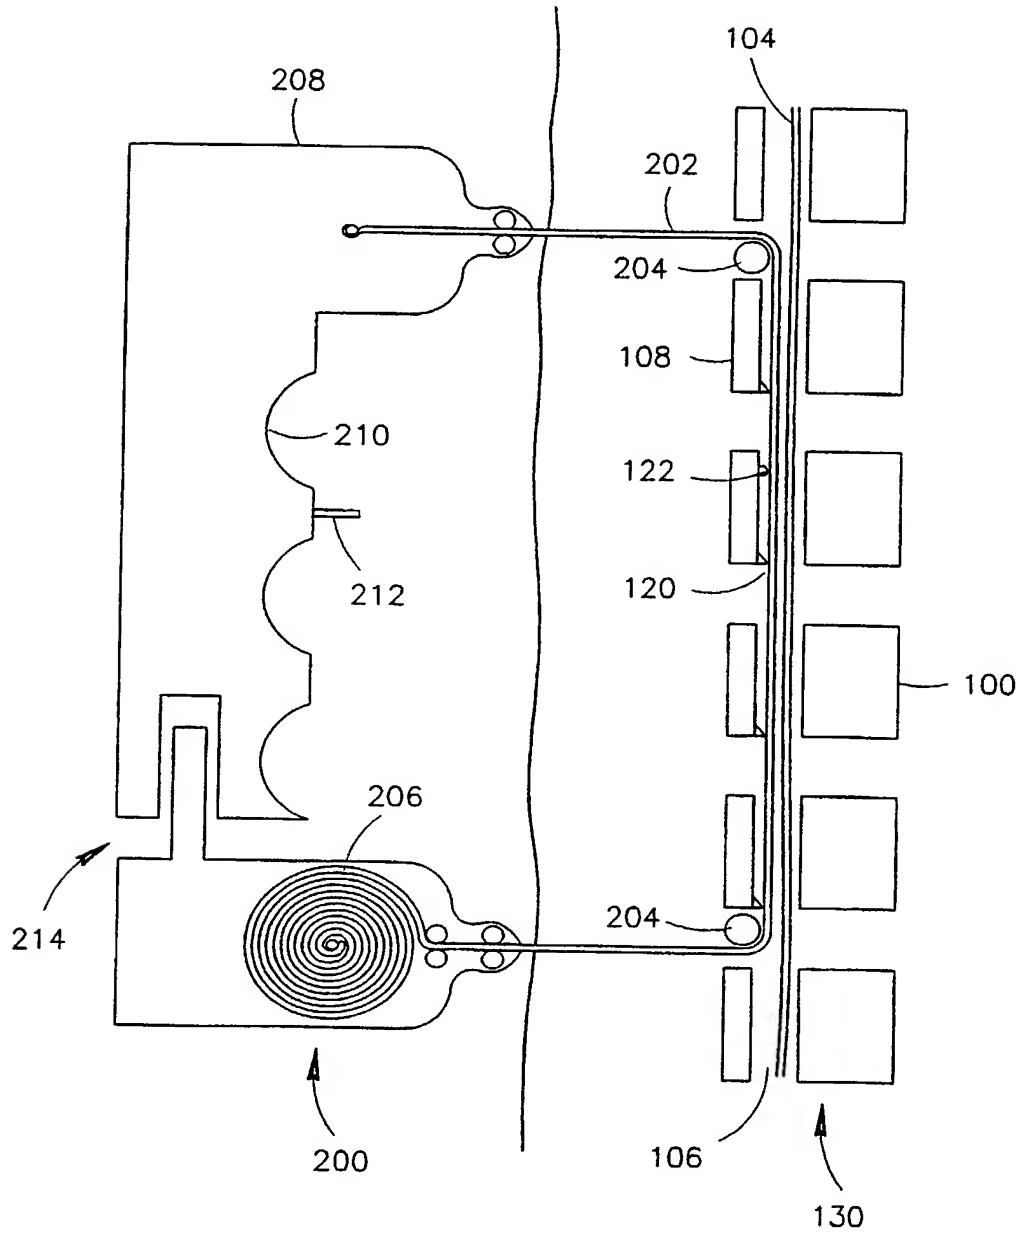


FIG.2

3/8

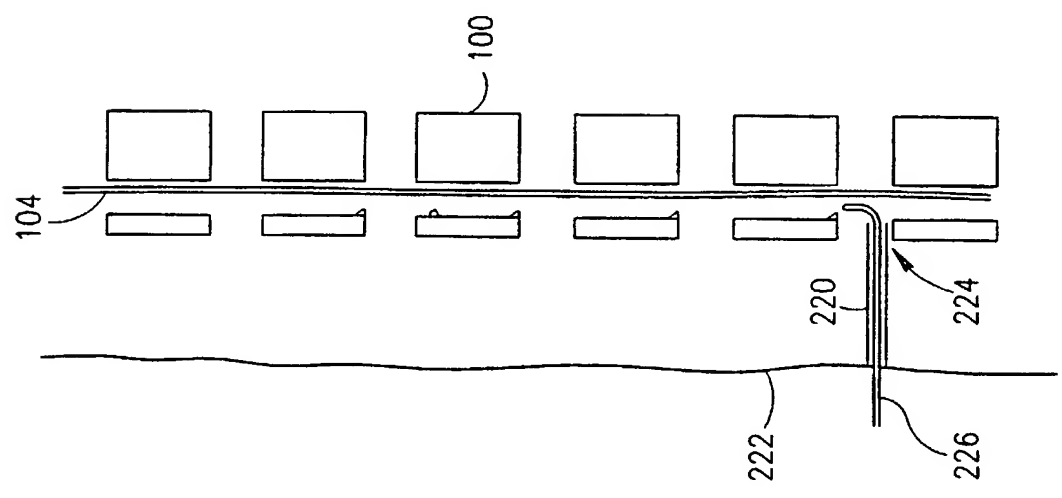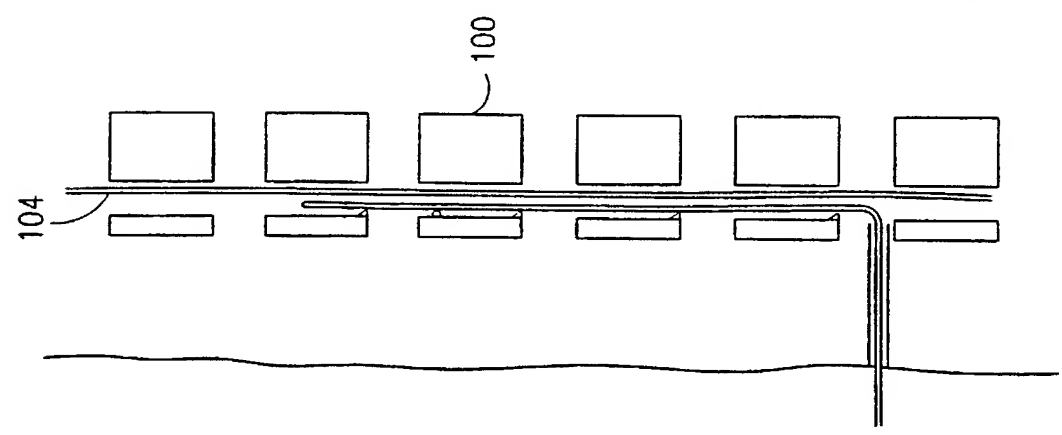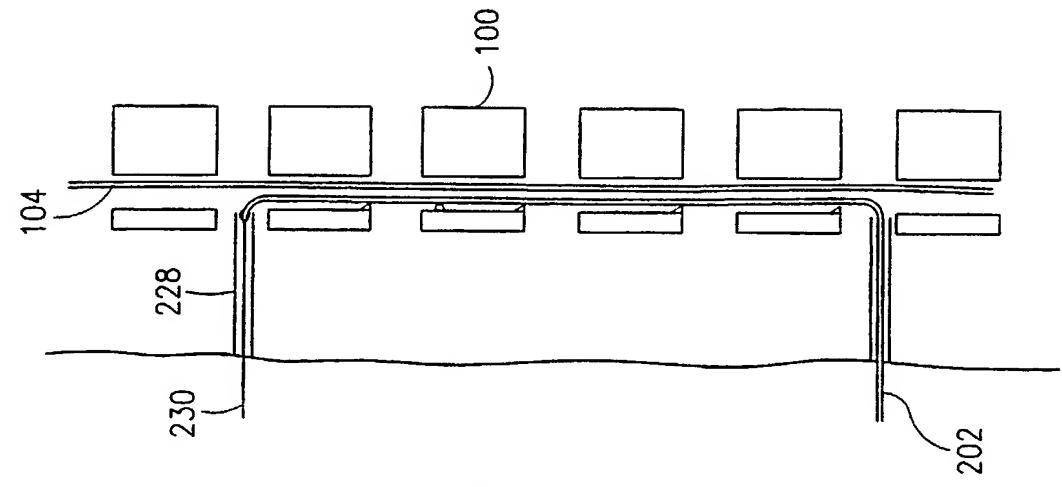

4/8



FIG. 4A




FIG. 4B

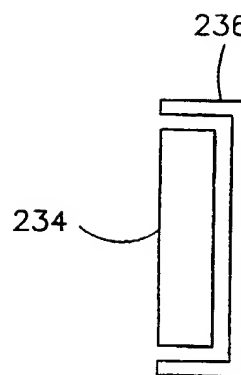


FIG. 4C

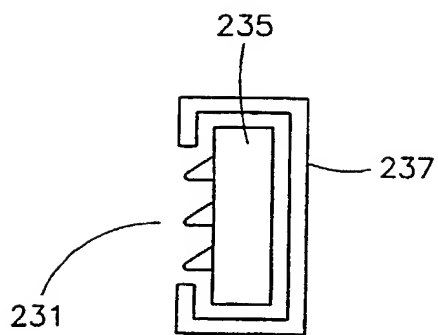


FIG. 4D






FIG. 4E

5/8

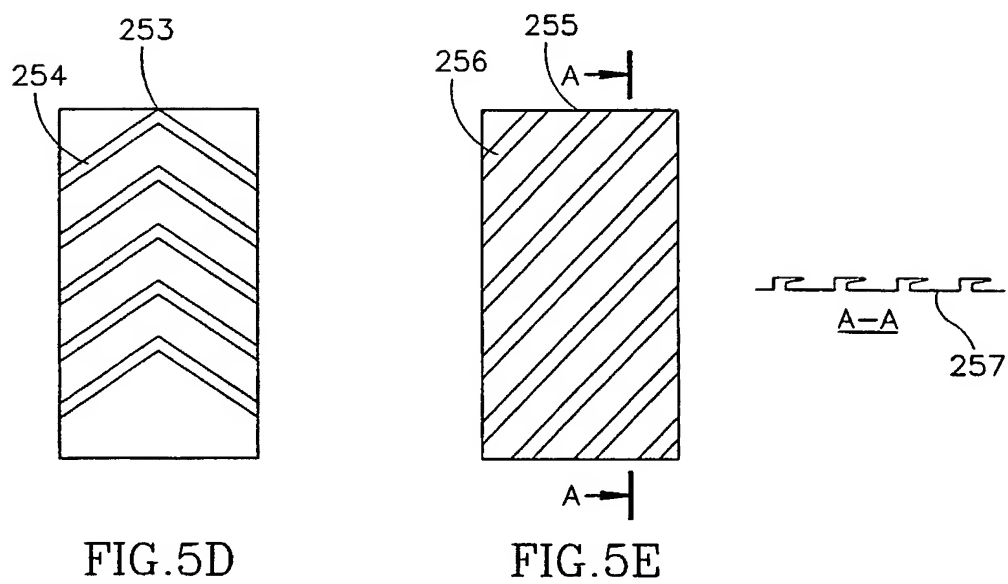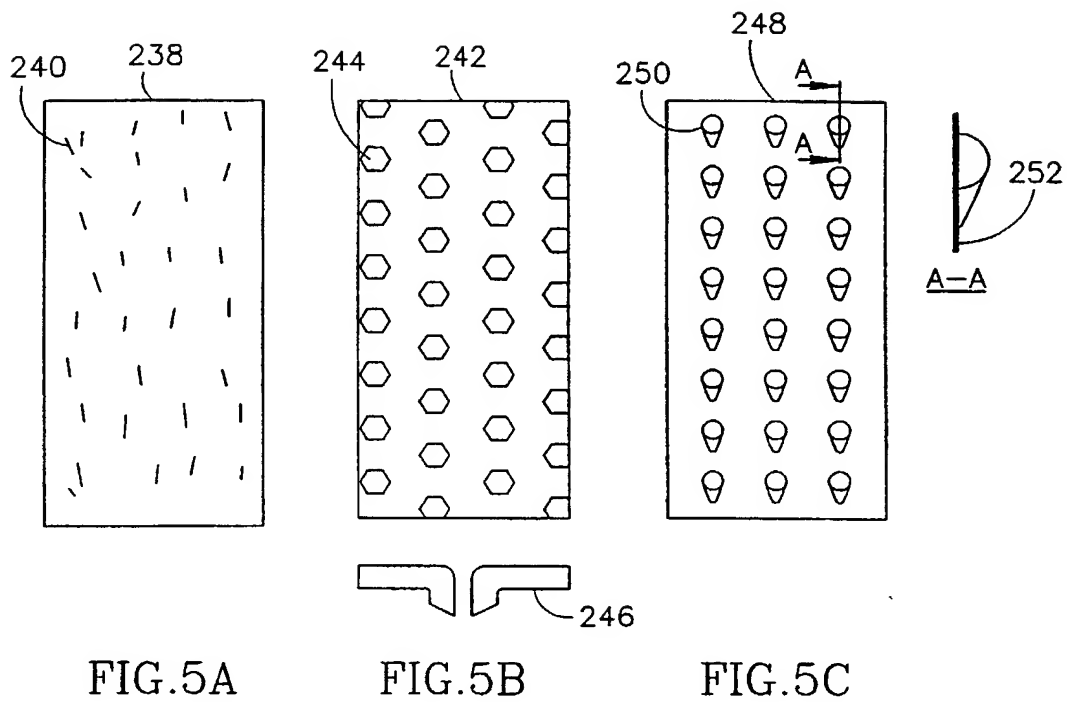

6/8

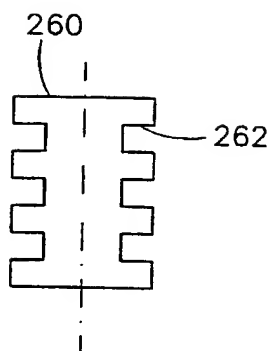


FIG. 6A

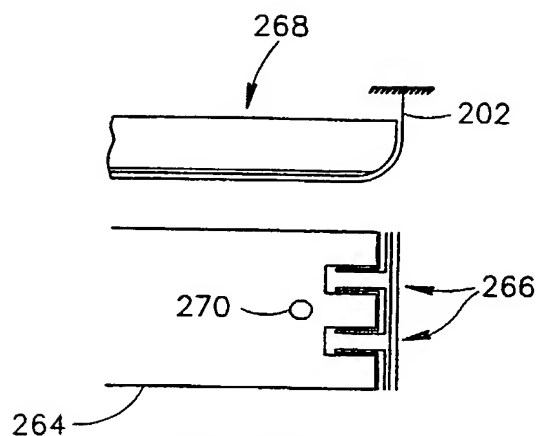


FIG. 6B



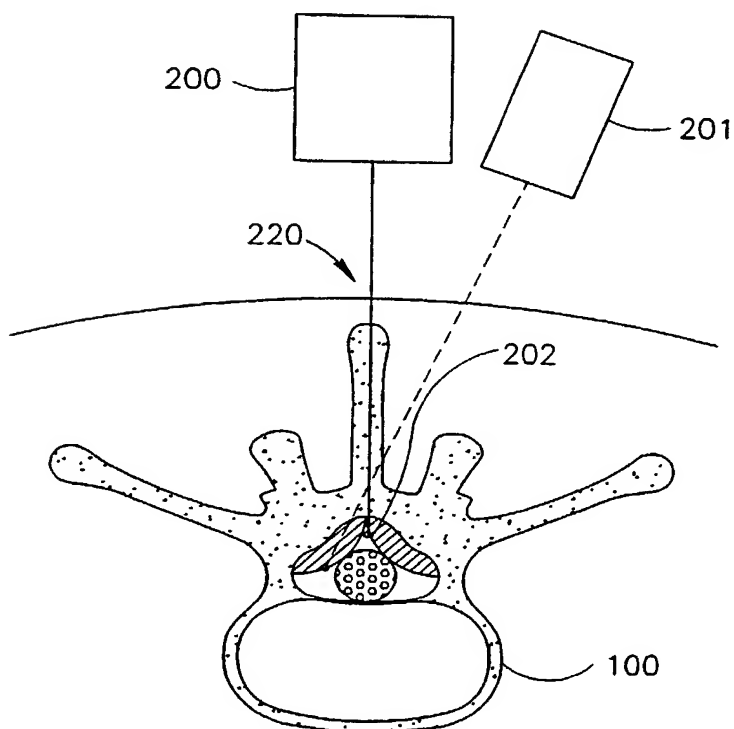


FIG. 7

7/8

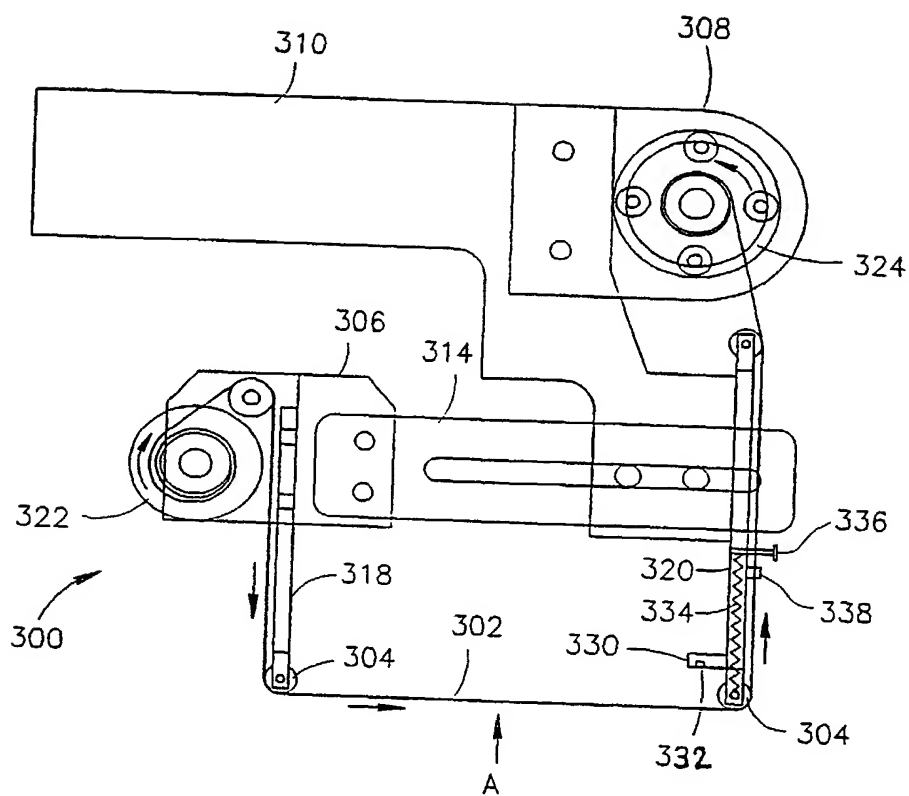

VIEW A

FIG. 8A

8/8

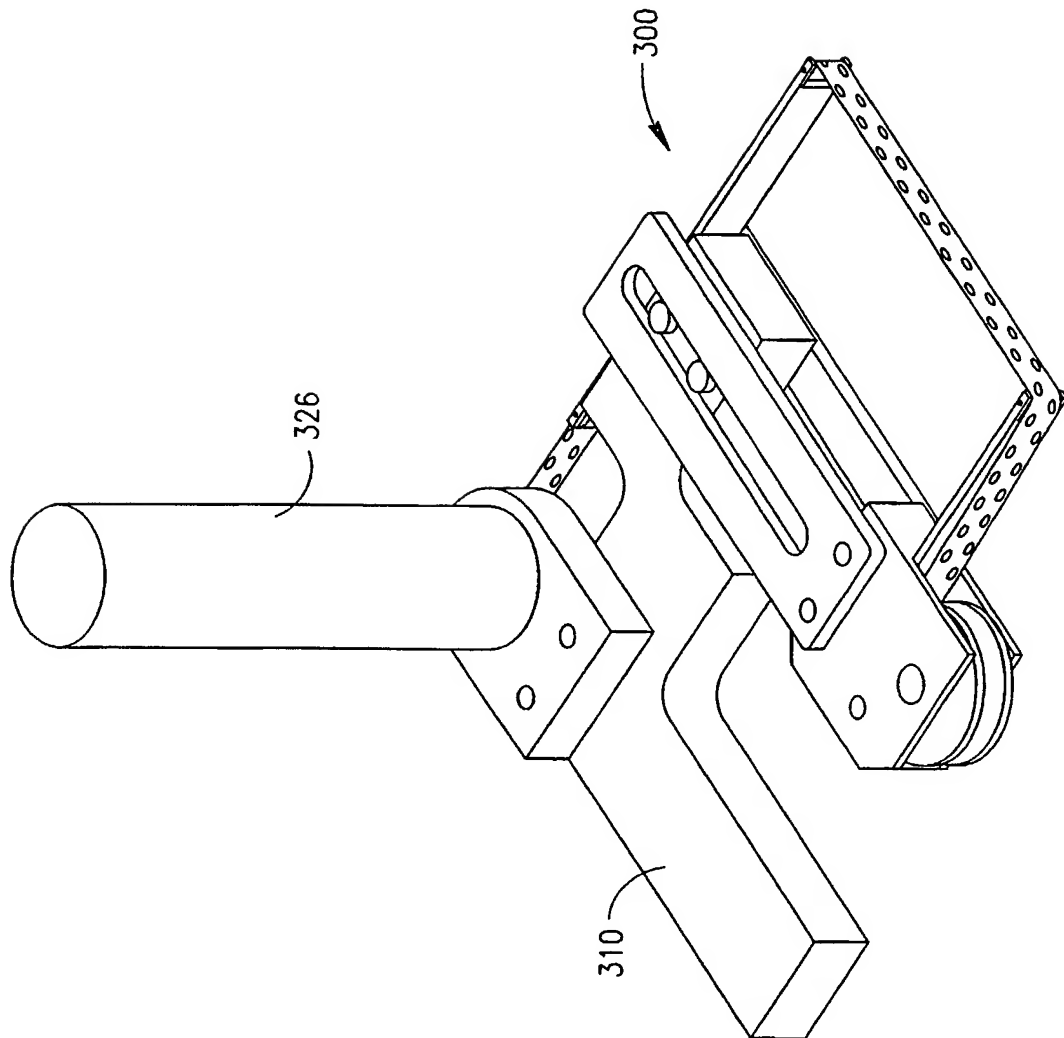


FIG. 8B

Docket No.
1.10/02047

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS FOR SPINAL PROCEDURES

the specification of which

(check one)

☒ Is attached hereto.

was filed on August 1, 2000 as United States Application No. or PCT International Application No. 2000/010000

Application Number PCIT/IL00/00458 Date 08/10/03 1450

and was amended on

(If applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

134197

(Number)

(Number)

(N47468)

Increased.

(Country)

{Country}

(COUNTRY)

1 August 1999

(Day/Month/Year Filed)

(Day/Month/Year Filed)

(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)	(Filing Date)
(Application Serial No.)	(Filing Date)
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States application(s), or Section 385(e) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R., Section 1.85, which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Paul Fenster, Reg. No. 33,577

Malar Fenster, Reg. No. 41,016

Phillip A. Weiss, Reg. No. 39,863

Frederick Schack, Reg. No. 44,938

William H. Dippert, Reg. No. 26,723

Lloyd McCarty, Reg. No. 30,423

Julius E. Goldstein, Reg. No. 24,918

Eugene LaPenna, Reg. No. 35,020

Stephen M. Chin, Reg. No. 39,908

David P. Lunt, Reg. No. 44,867

Gerald H. Klot, Reg. No. 26,116

Arthur Dresner, Reg. No. 24,403

Samir R. Patel, Reg. No. 44,998

Harry H. Ahn, Reg. No. 48,343

Send Correspondence to: William H. Dippert, Esq.
Read Smith LLP
599 Lexington Avenue, 30th Floor
New York, NY 10022-0650


Direct Telephone Calls to: (name and telephone number)
William H. Dippert (212) 631-5400

1-80

Full name of sole or first inventor	
<u>Asaf Dippert</u>	
Sole or first inventor's signature	
<u>X</u>	<u>As. Dippert</u>
Date	<u>X 3/11/97</u>
Residence	
<u>426 Livers Street, Nava-Savva, 60407, Israel</u>	
Citizenship	
<u>Israel</u>	
Post Office Address	
<u>426 Livers Street, Nava-Savva, 60407, Israel</u>	

Full name of second inventor, if any	
Second inventor's signature	
Date	
Residence	
Citizenship	
Post Office Address	

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

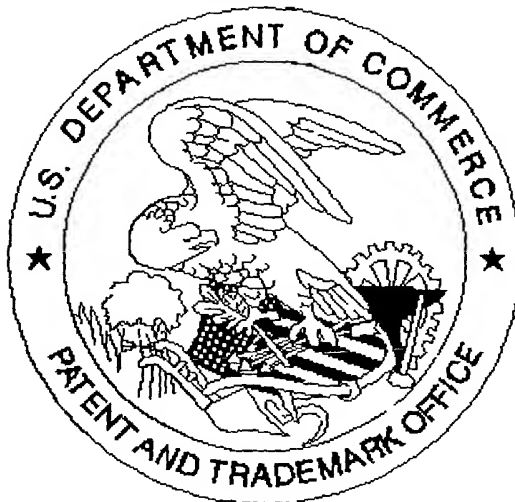

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ Scanned copy is best available. Declaration date